

PrintTex®

Softimage Lightbox

Fields of application

.01 .02 .04 .05 .06 .07 .11

Specifications



599180 173



100% polyester
knit fabrics



ca. 155/ 252/ 310/ 505 cm
ca. 61/ 99/ 122/ 199 inch
other widths available on request



B-s1, d0 DIN EN 13501-1
Class A ASTM E84-16



ca. 205 g/m²
ca. 6.1 oz/yd²



ca. 0.36 mm
ca. 360 µm



rolls
50/ 100 m
55/ 109 yd



blank: 5
DIN EN ISO 105-B02



blank: 35.7 %
DIN EN 410



blank: 93.7
DIN 5033-1



length: 2.2 %
cross: 0.9 %
DIN EN 14704-1



cold, ultrasonic cut



length: 290.7 N
cross: 1119.3 N
DIN EN ISO 13934-1 - max. tensile strength



length: 65.4 %
cross: 34.0 %
DIN EN ISO 13934-1 - max. tensile elongation



length: 26.1 N
cross: 13.7 N
DIN EN ISO 13937-2 - trouser tear propagation



indirect light

Printing methods

print	UV	Latex	Dyesub
Inside	•	•	
Outside			

Certifications




Certified for
HP Latex Inks



PrintTex® Softimage Lightbox

Fields of application

.01 .02 .04 .05 .06 .07 .11

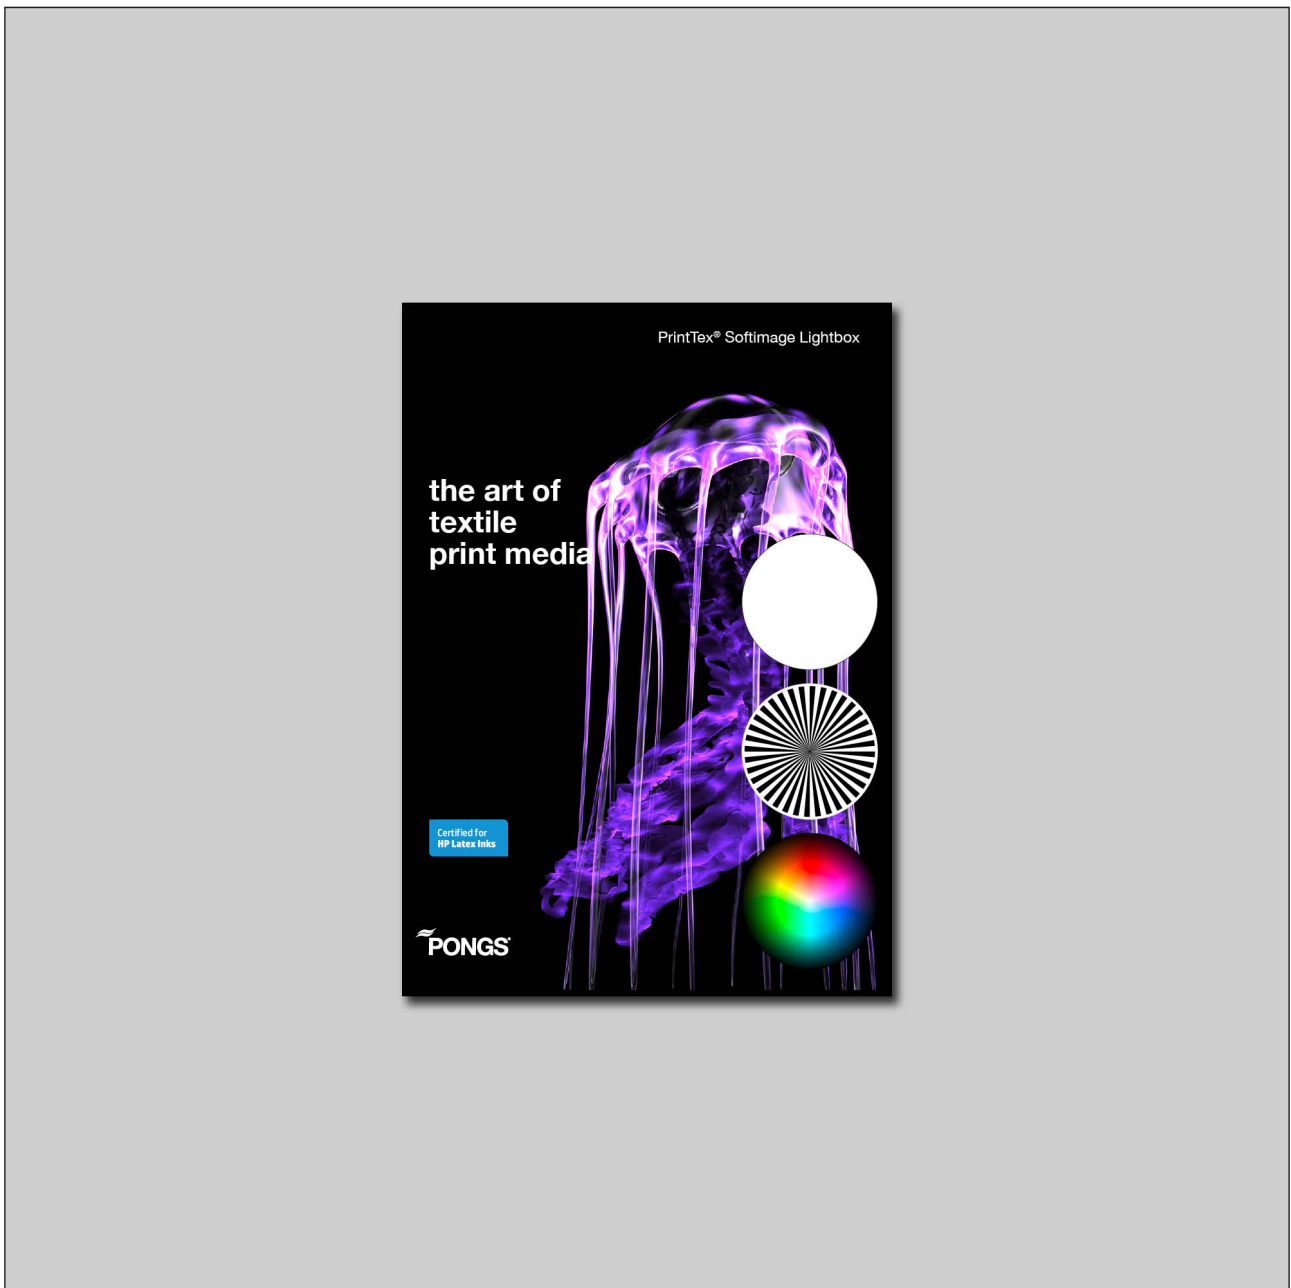

Ref.-Nr.: 599180 173 | Preview print sample



PONGS Technical Textiles GmbH

Bahnhofstraße 21
07919 Pausa-Mühltröf
Germany

Phone +49 36645 350-0
salestt@pongs.de
www.pongs.com

We reserve the right for technical modifications.
The above mentioned details are non-binding.
A tolerance of $\pm 5\%$ is valid. Effective: 2019/06